


**Light Duty B125 Trench Covers**  
**28,000lb / 12.5 Tonnes**

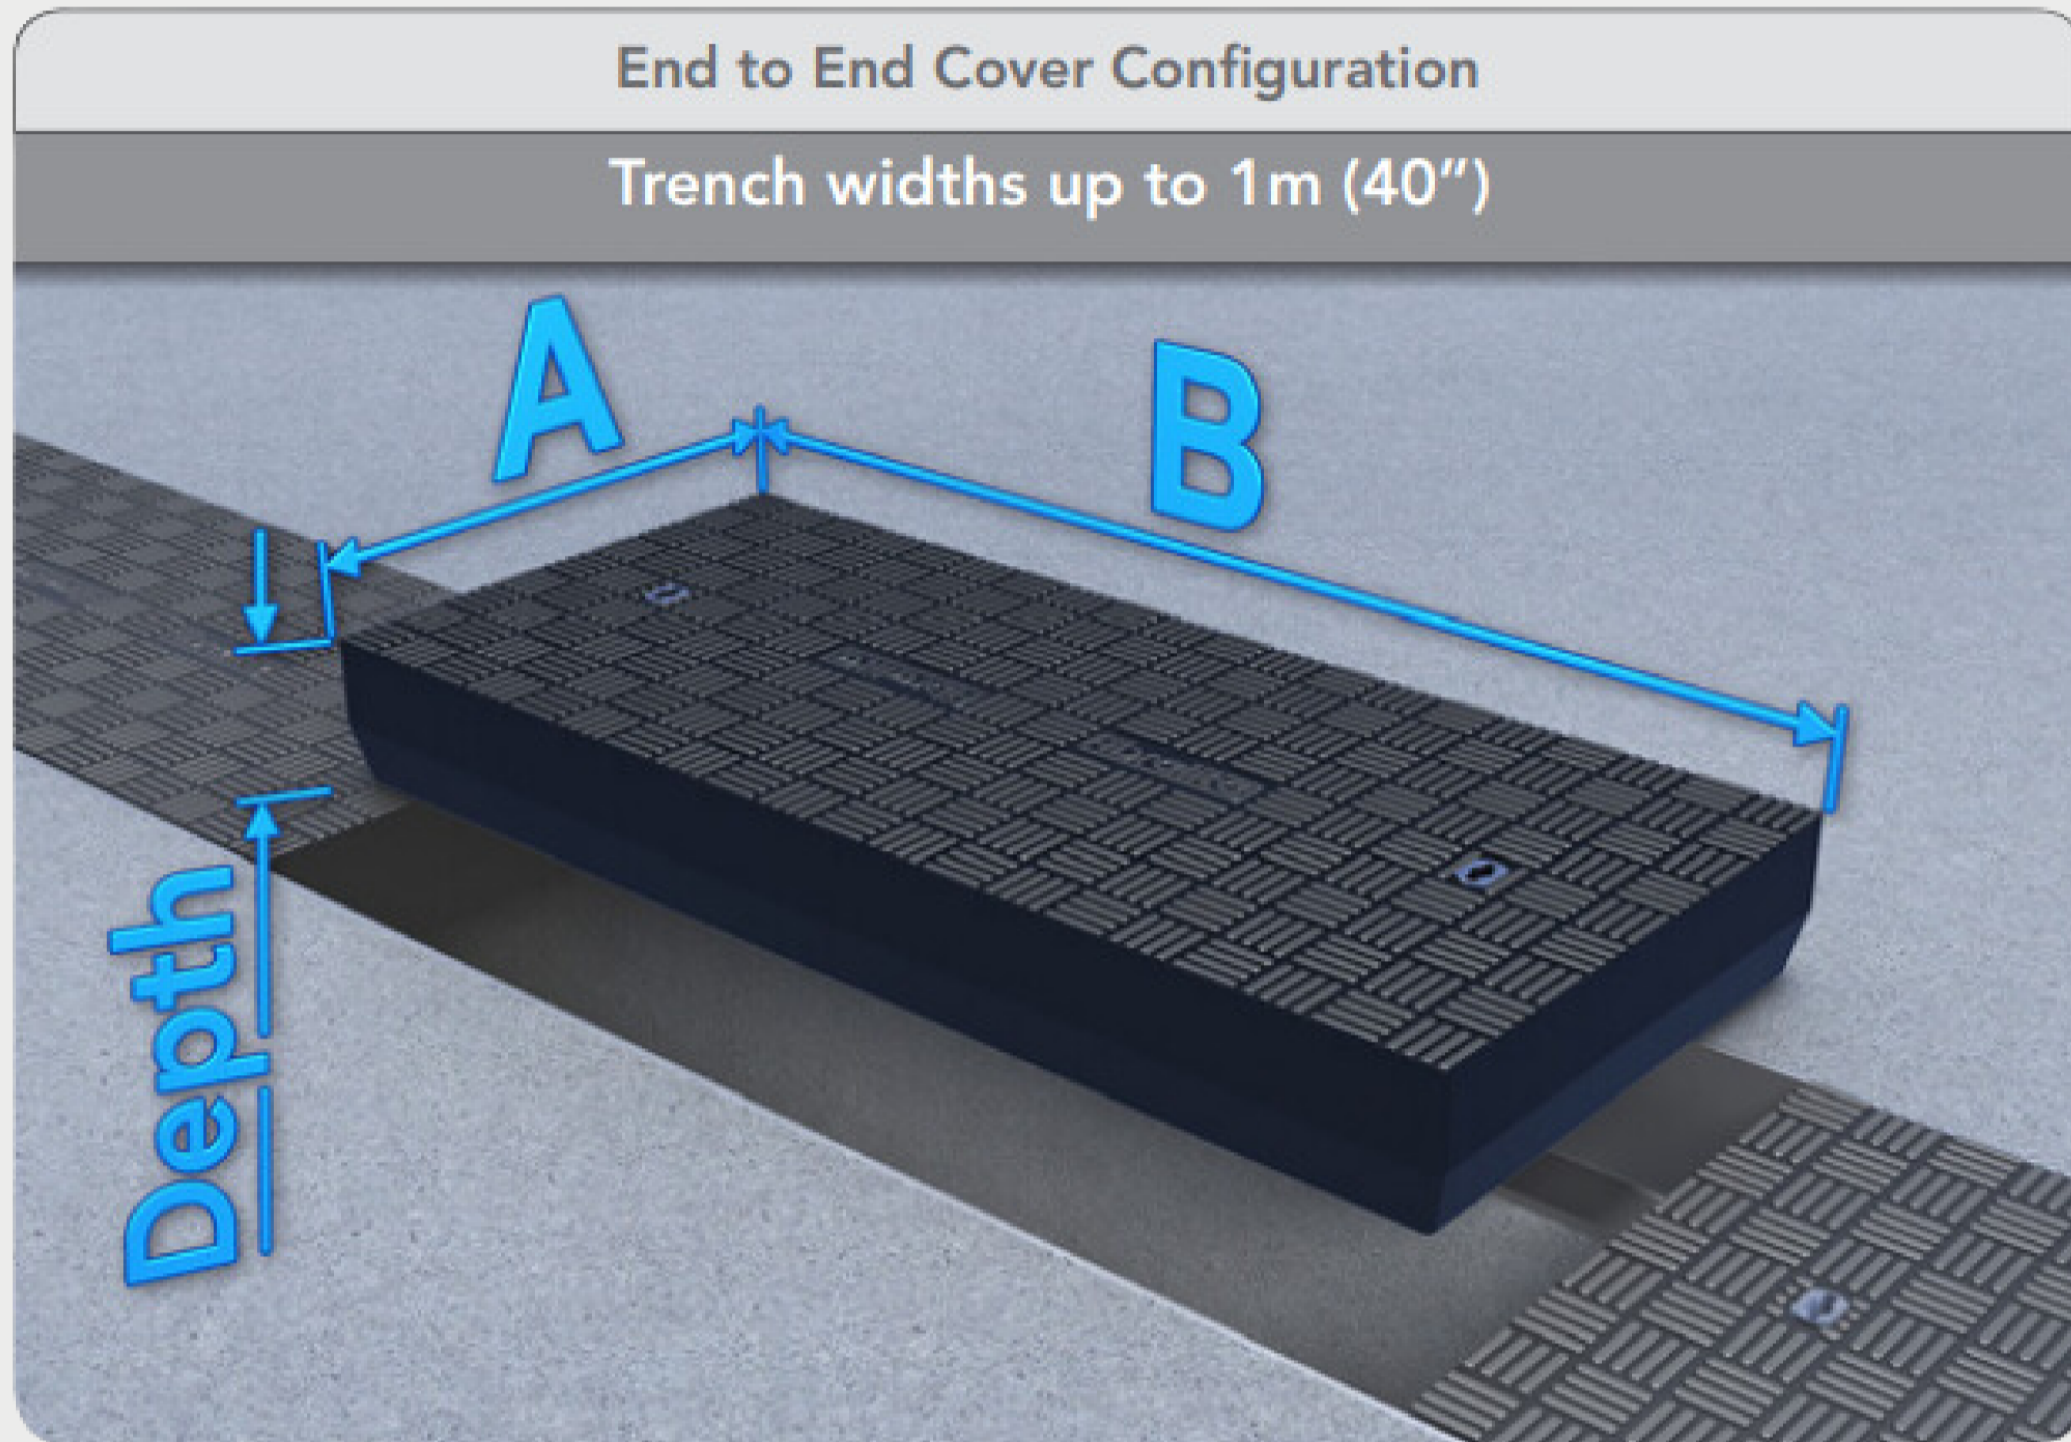


Dim 'A'	Dim 'B'	Depth	Weight
300 - 800mm (12" - 32")	450 - 1800mm (18" - 72")	50mm (2")	35 kg/M <sup>2</sup> (7 lbs/ft <sup>2</sup> )
300 - 1000mm (12" - 40")	450 - 1800mm (18" - 72")	76mm (3")	42 kg/M <sup>2</sup> (9 lbs/ft <sup>2</sup> )
300 - 1000mm (12" - 40")	450 - 1600mm (18" - 64")	101.6mm (4")	42 kg/M <sup>2</sup> (9 lbs/ft <sup>2</sup> )
300 - 800mm (12" - 32")	450 - 1600mm (18" - 64")	117mm (4 5/8")	43 kg/M <sup>2</sup> (9 lbs/ft <sup>2</sup> )
800 - 1000mm (32" - 40")	450 - 1400mm (18" - 56")	117mm (4 5/8")	43 kg/M <sup>2</sup> (9 lbs/ft <sup>2</sup> )
300 - 1000mm (12" - 40")	450 - 900mm (18" - 36")	203.2mm (8")	61kg/M <sup>2</sup> (12 lbs/ft <sup>2</sup> )


**Light Duty B125 Trench Covers**  
**28,000lb / 12.5 Tonnes**

Side by Side Cover Configuration

Trench widths over 1m (40") up to 1.6m (64")

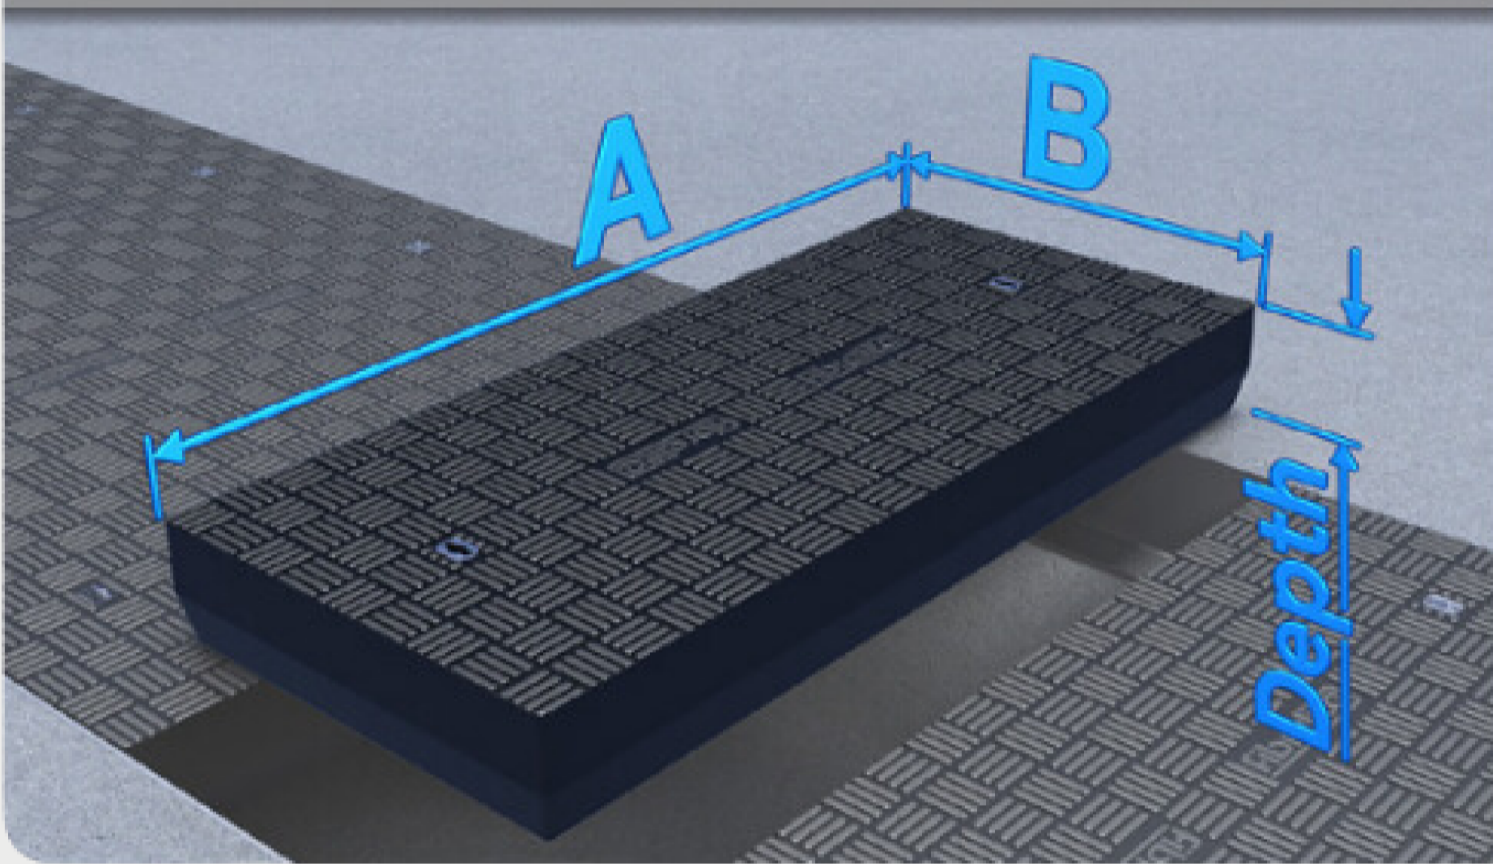

Trench widths over 1.6m (64")

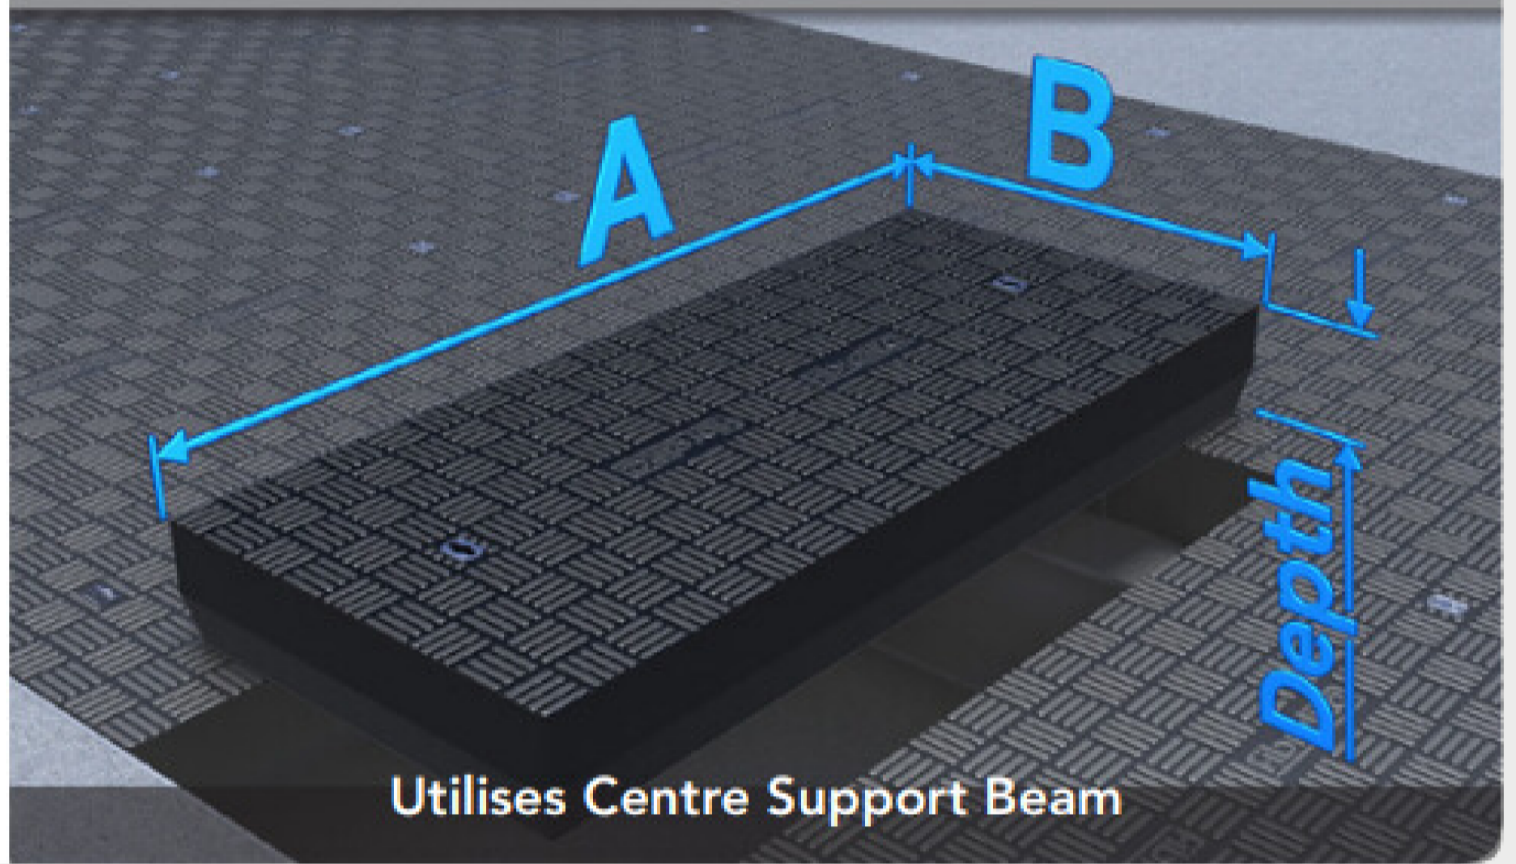

Utilises Centre Support Beam

Dim 'A'	Dim 'B'	Depth	Weight
1000 - 1200mm (40" - 48")	450 - 800mm (18" - 32")	76mm (3")	52kg/M <sup>2</sup> (11 lbs/ft <sup>2</sup> )
1000 - 1500mm (40" - 60")	450 - 800mm (18" - 32")	101.6mm (4")	48 kg/M <sup>2</sup> (10 lbs/ft <sup>2</sup> )
1000 - 1600mm (40" - 64")	450 - 700mm (18" - 28")	117mm (4 5/8")	53 kg/M <sup>2</sup> (11 lbs/ft <sup>2</sup> )
1000 - 1800mm (40" - 72")	450 - 600mm (18" - 24")	117mm (4 5/8")	53 kg/M <sup>2</sup> (11 lbs/ft <sup>2</sup> )
1000 - 1600mm (40" - 64")	450 - 600mm (18" - 24")	203.2mm (8")	61kg/M <sup>2</sup> (12 lbs/ft <sup>2</sup> )